


Film wrapper FM 01

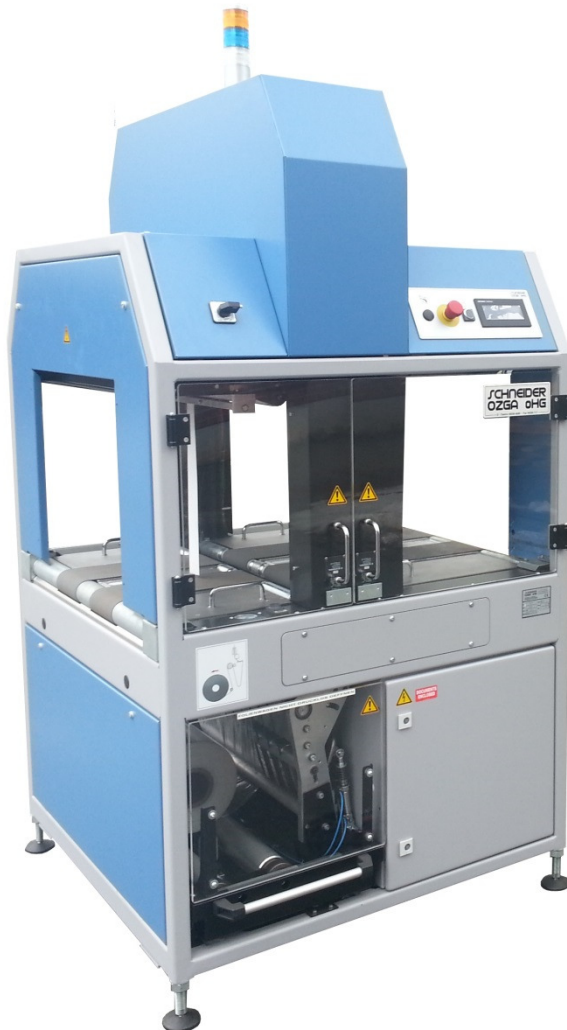

The fully automatic film wrapper FM 01 protects the package with plastic film without welding system. It saves energy and is environmentally friendly. As well almost all commercial films with perfect availability will be processed. Easy operation by touch screen and only one roll of film.

- Energy saving, standby function
- No fumes
- No pre-heating time
- Only one lower film roll
- Package size L x W x H max. 500 x 500 x 400 mm
- Up to 30 bundles per minute
- Without welding

Suitable for operation with bundles of newspapers, magazines and commercial printers.

Schneider u. Ozga GmbH & Co. KG.
Maschinen- u. Anlagenbau
Am Bahnhof 3
95463 D-Bindlach

Tel: +49 9208 668 0
Fax: +49 9208 717
e-mail: info@schneider-ozga.de
www.Schneider-Ozga.de

TECHNICAL DATA

Capacity

Up to 30 bundles / min at 1x L + 2x H = 600mm

Up to 20 bundles / min at max. size

Bundle size

Length:	max.	500 mm
	min.	130 mm
Width:	max.	500 mm
	min.	180 mm
Height:	max.	400 mm
	min.	10 mm

Bundle weight

max. 25 kg

Film material

thickness: min. 10µm – 50µm mm

Dimensions of the film roll

core diameter:	90 mm
outside diameter:	app. 300 mm
width:	200-600 mm

Electrical supply

400 V, 3 phase, N+PE, 50 Hz

Electricity requirement

1,6 kW

Pneumatic

working pressure: 6 bar

Consumption

78 l/min. (3,9 l/bundle) free air

Conveyor speed

app. 21 – 51 m./min.

Weight

app. 600 kg

BASIC EQUIPMENT

- Bundle counter
- Colour RAL 5007 (brilliant blue)
- Connections for tail back in and tail back out with a plug
- Conveyor belts infinitely variable by the touchscreen
- Counter operation hours
- Dual Start-, Stop- and Emergency Stop
- Film brake control
- Film roll detection
- LED signal tower for operation mode
- PLC control with four adjustable programs for different products
- Quick - connector for air supply
- Servo drives for exact positioning
- Standby function
- Touchscreen, lockable with free programmable code

SPECIAL EQUIPMENT (extra charge)

- Air gun with spiral hose
- Cable numbering
- Dual touch screen on both sides
- Light at the inside of the machine
- Machine with wheels and castors
- Power supply without neutral wire
- Special colour

Dimensions

